

LED INGROUND LIGHT

UGL07



Advantages:

- ♦ Aluminum die-casting structure, the use of acid salt sealant, with good cooling effect installation of embedded parts structure (stainless steel 304) , no gaps between 2 units after installation, easy commissioning and maintain
- ♦ IP67 waterproof, white light & static colors, color changing/tunable
- ♦ Diffuser and clear glass both options for different application, custom-made dimension, dedicated anti-corrosion wire

Applications:

Suitable for park square, street landscape lighting




P40

Product specification:

Light Source: CREE / OSRAM / EPISTAR	Materials: Alum / Tempered Glass
Color: 1800~7500K / Single color / RGB / RGBW	Dimension(mm): 1000mm x 52mm x 80mm / Custom-made optional
Pixel: 1	IP Grade: IP67
LED QTY: 48~60PCS(Diffuser Glass) / 18~48PCS(Clear Glass)	Lifespan: 50,000hrs
Power: 12W / 18~48W	Operating Temp.: -20°C --50°C
Voltage: DC24V	Storage Temp: -40°C --70°C
Control System: DMX512 / ON-OFF / DALI	Beam Angle: 180° (Diffuser Glass) / 5° ~120° (Clear Glass)

Product Size:

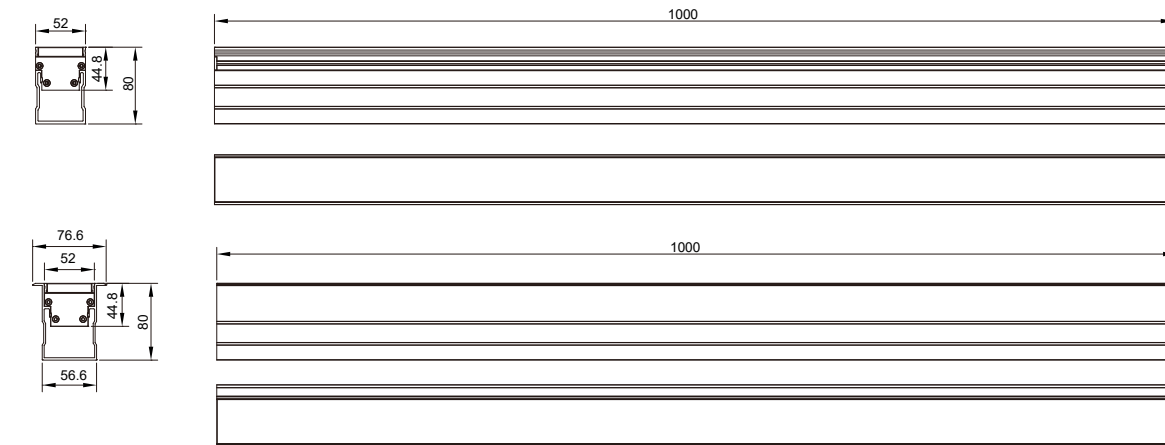


Product Features:

Single color icon



Full color icon



Specification:

Model No.	Casing	Light Source	Color	Voltage	Power
UGL-D07A-D48	Alum+Tempered Glass	48PCS LED	Single color	DC24V	12W
UGL-D07A-D60	Alum+Tempered Glass	60PCS LED	Single color	DC24V	15W
UGL-D07A-Q48	Alum+Tempered Glass	48PCS LED	RGB/RGBW	DC24V	12W
UGL-D07A-Q60	Alum+Tempered Glass	60PCS LED	RGB/RGBW	DC24V	15W
UGL-D07B-D18	Alum+Tempered Glass	18PCS LED	Single color	DC24V	18W
UGL-D07B-D24	Alum+Tempered Glass	24PCS LED	Single color	DC24V	24W
UGL-D07B-D36	Alum+Tempered Glass	36PCS LED	Single color	DC24V	36W
UGL-D07B-Q18	Alum+Tempered Glass	18PCS LED	RGB/RGBW	DC24V	18W
UGL-D07B-Q24	Alum+Tempered Glass	24PCS LED	RGB/RGBW	DC24V	24W
UGL-D07B-Q36	Alum+Tempered Glass	36PCS LED	RGB/RGBW	DC24V	36W

/P41