

URM III


Ease of Use



reddot winner 2021



A Click of Genius

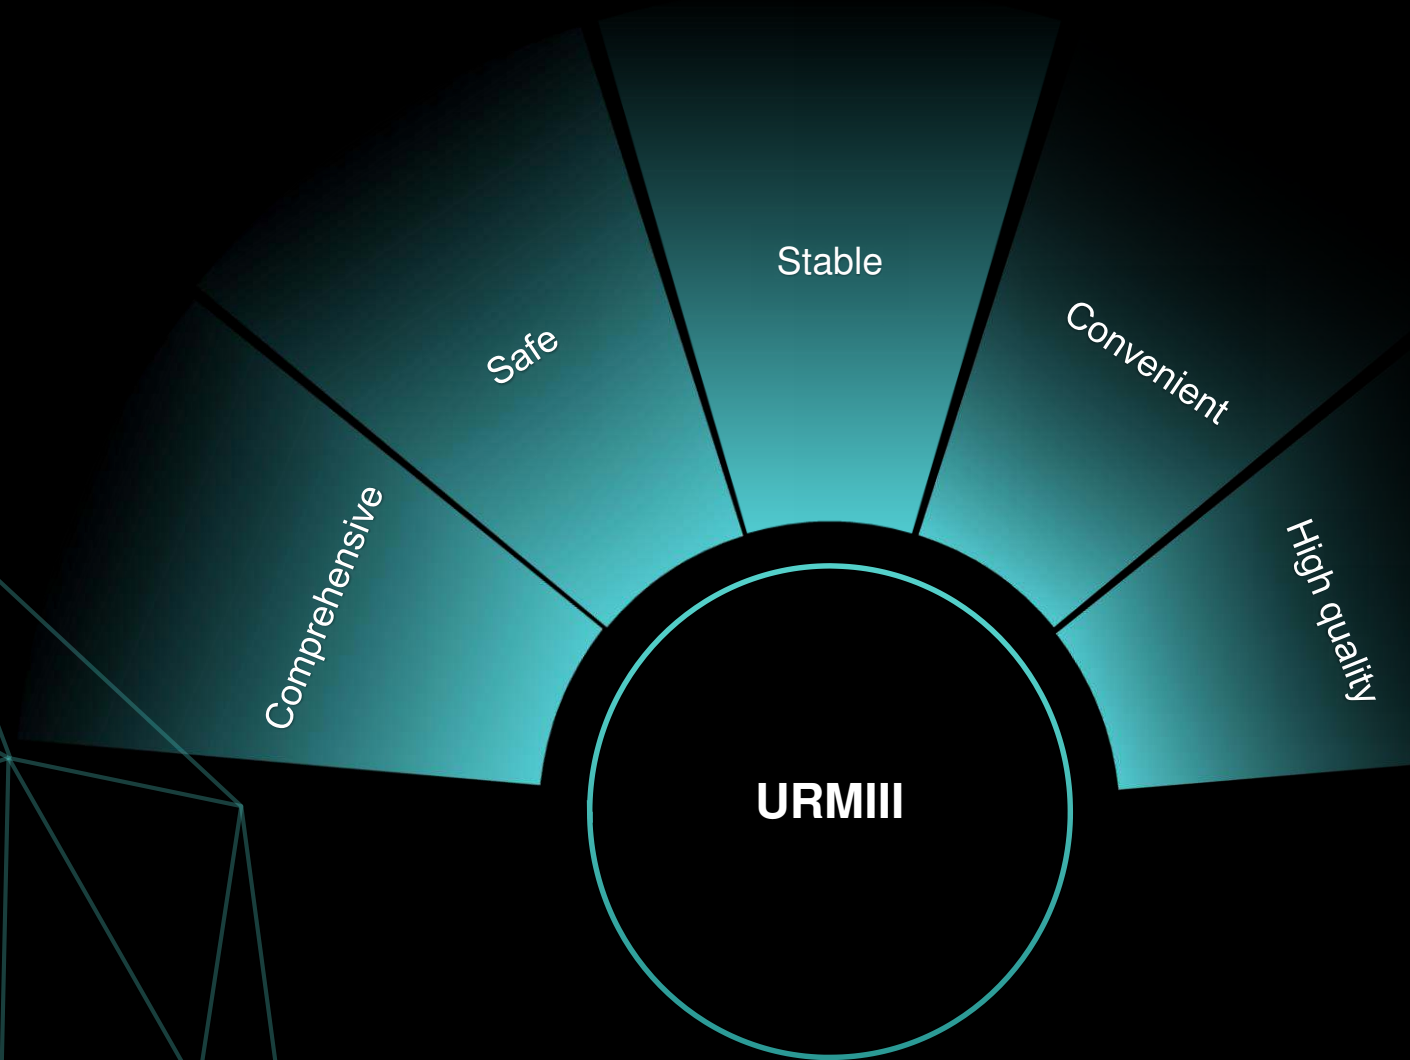

Comprehensive

Safe


Stable

Convenient

High quality

URMIII

URMIII, Connecting Value

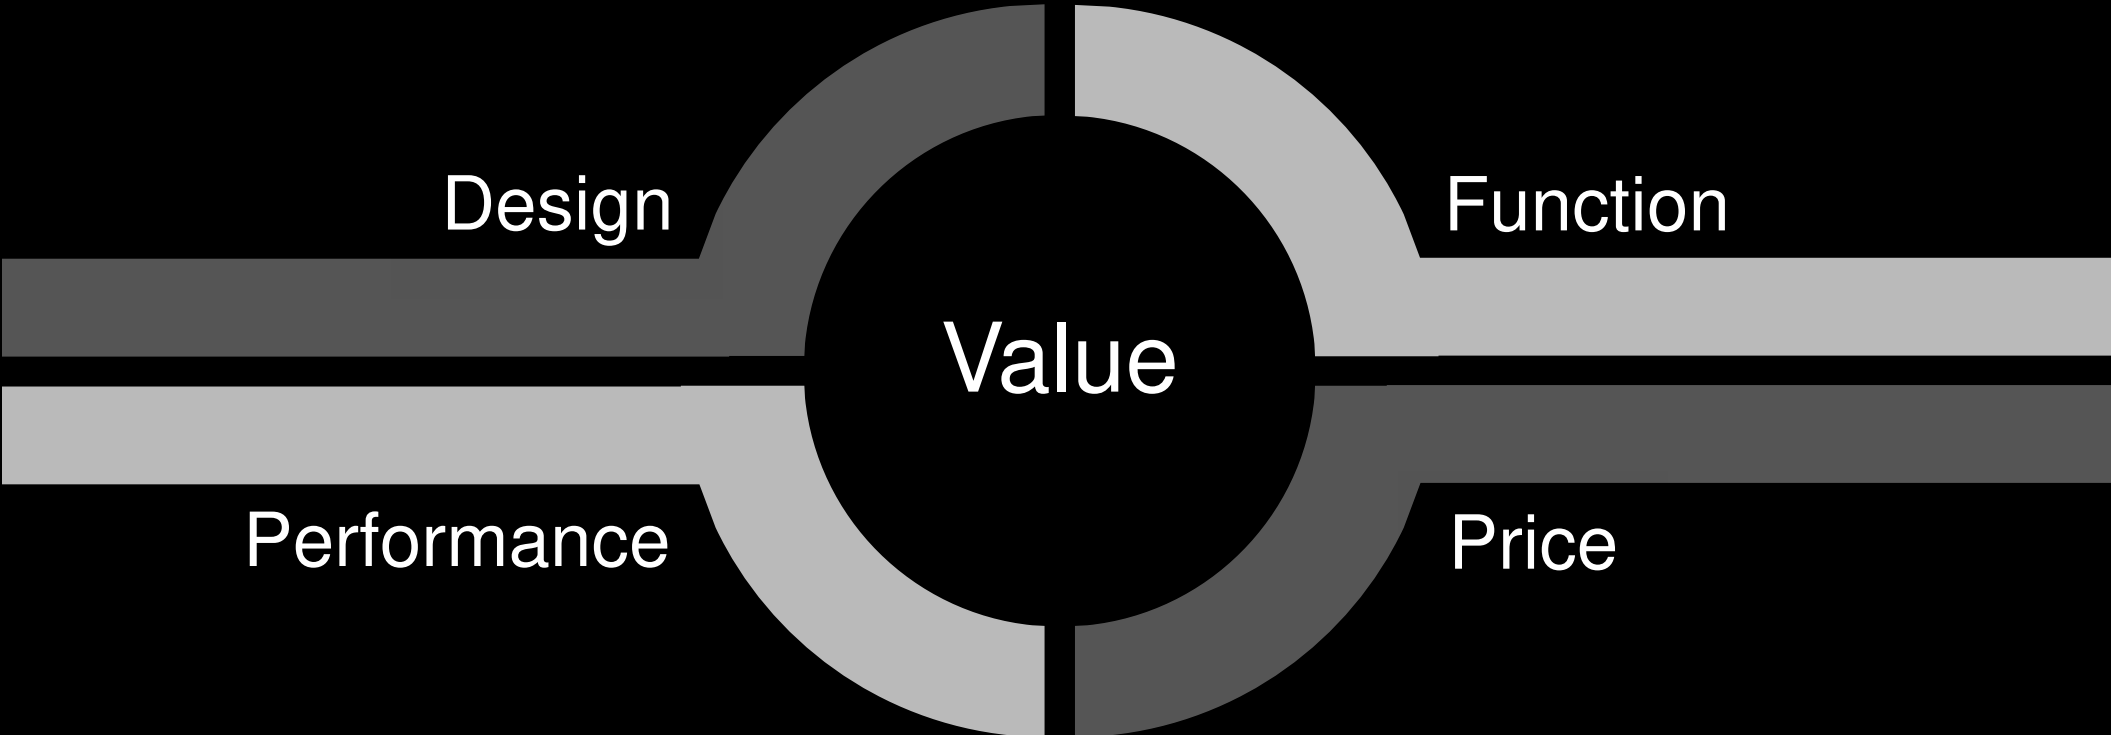

Design

Unilumin
URMIII—Ease of Use

Comfortable handle

Diagonal-shaped heat dissipation bars


Efficient modular operation

Ultra-slim frame



Features

Unilumin
URMIII—Ease of Use

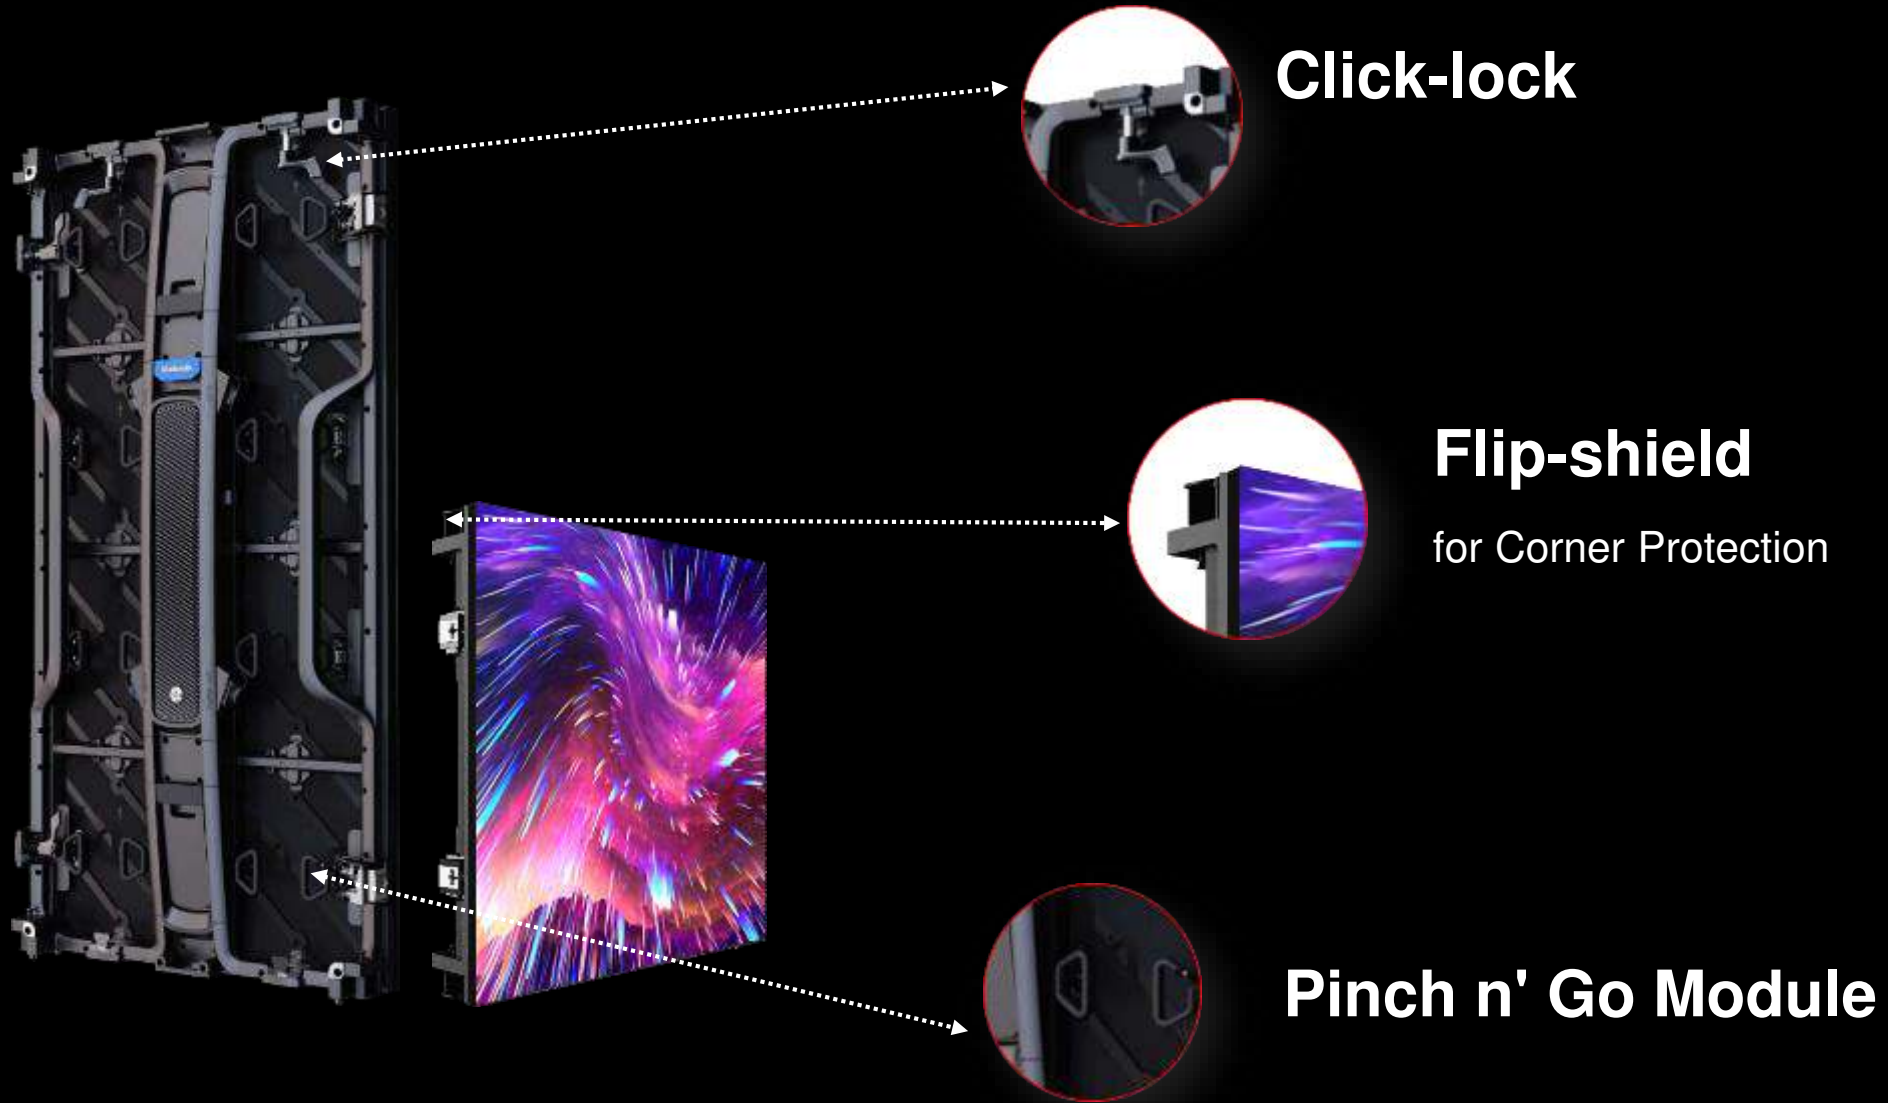

Pain Point

Have you ever been bothered by the time and effort required to install a screen?



Time and energy consuming & instability

Click-lock—True Single-person Installation

Unilumin
II—Ease of Use

1

Click to pop up the King PIN

2

Stack the tiles, and they lock automatically


3

Push the clasp inward with fingers to double-lock



Pain Point

Have you ever been bothered by the effort involved in module disassembly?

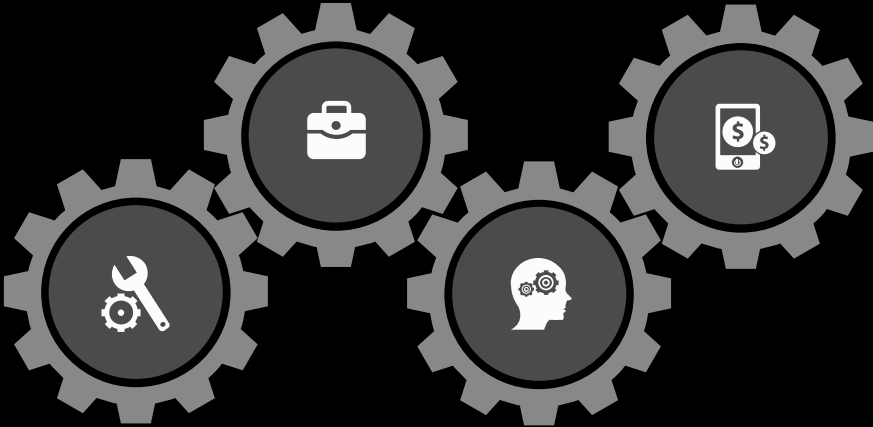


Difficult to disassemble modules & need a variety of tools

Module Release



Pinch



Slightly Push Outward




Effectively improve the efficiency of screen maintenance, reduce maintenance time and energy.

NOTE: Standard for outdoor, optional for indoor

Pinch n' Go Module—New Direction of Module

Unilumin
URMIII—Ease of Use

Pull Back

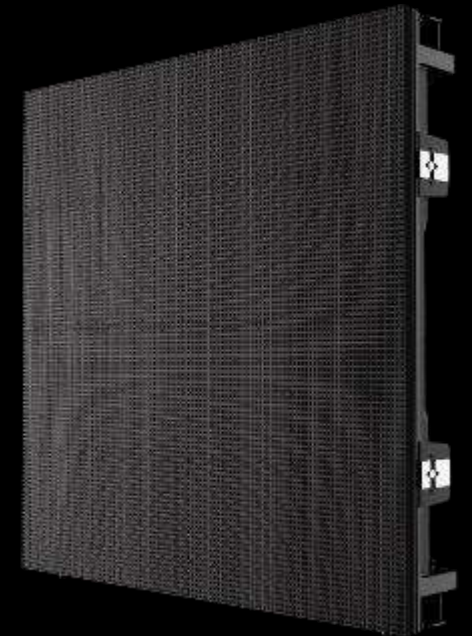

Simple pull-back and precise positioning systems make it convenient to ensure the flatness of the screen.

NOTE: Standard for outdoor, optional for indoor

Pain Point

Have you ever been bothered by the poor angle protection of screens?



Manual pop-up & Poor screen protection

Flip-shield— Comprehensive Corner Protection

Unilumin
URMIII—Ease of Use



3mm-shield Above
Lamp Face




Pop Up Automatically



Effectively avoid accidental impact from the lamp face, top and side, so as to achieve the effect of three-dimensional(3D) surface protection.

Pain Point


Have you ever been bothered by the simple shape and lack of choice for curved screens?

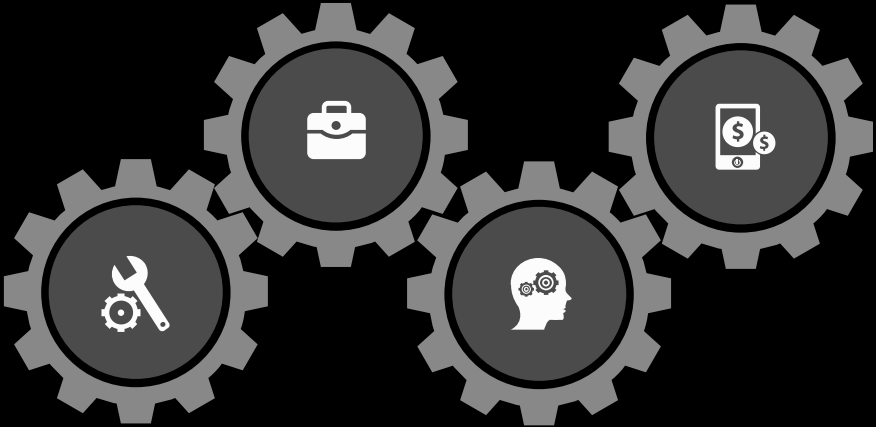

Few degrees for chosen & Low accuracy

Creative Installation

Unilumin
URMIII—Ease of Use

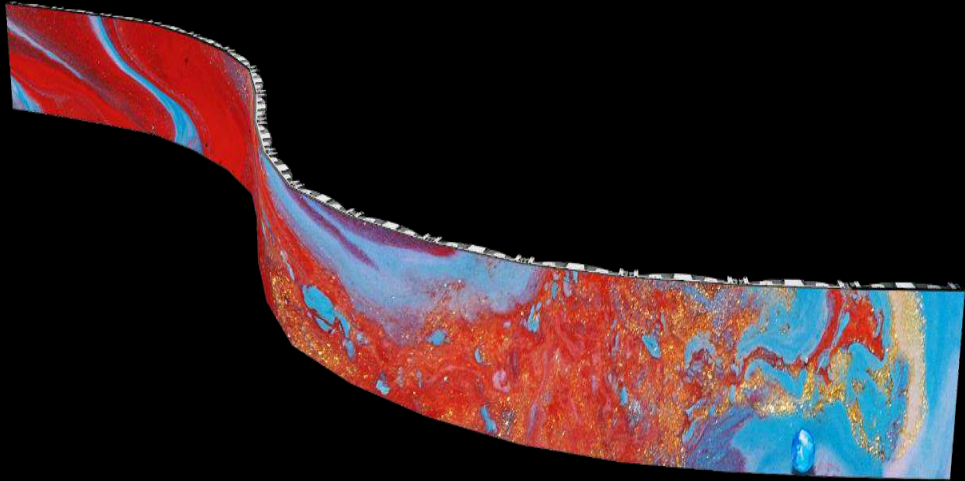


Curve Installation

-10° -8.75° -7.5° -6.25° -5° -3.75° -2.5° -1.25° 0° 1.25° 2.5°
3.75° 5° 6.25° 7.5° 8.75° 10°



90° Corner Installation

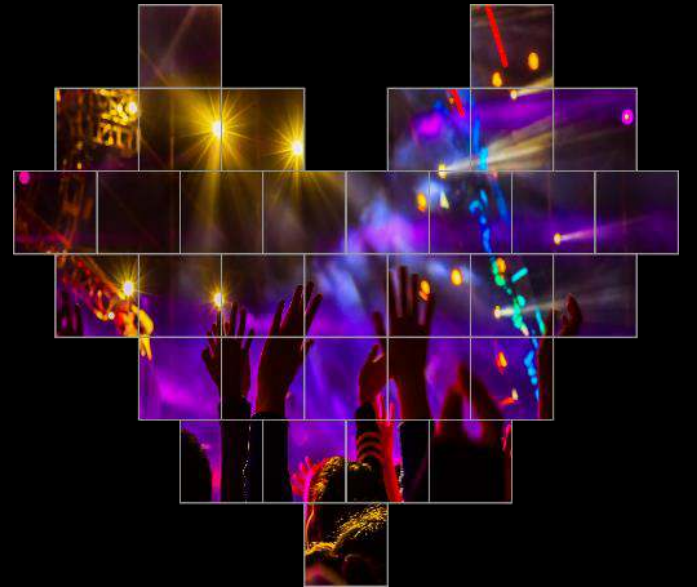

Others

More Features




HDR Technology



Compatible PSU Box




Bottom Protection



Modular Design

ABS Technology (Advanced Backup Sharing)

Unilumin
URMIII—Ease of Use

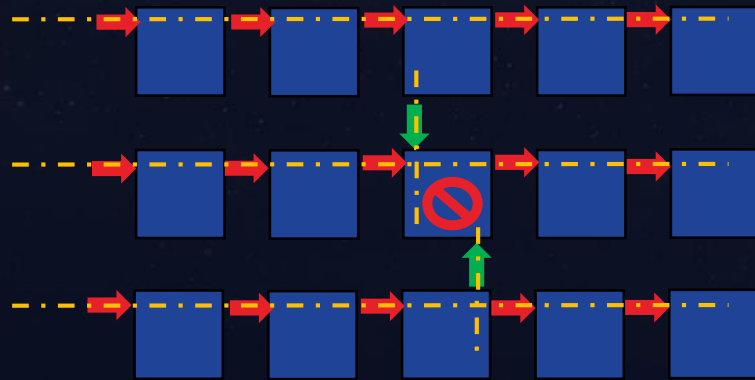

Quickly solve the power failure of the power box without disassembly.

When a power failure, power cord failure or aviation plug failure occurs, the adjacent cabinets will share the output current to make the screen display normally.

NOTE: Optional for indoor only

DDC Technology (Dual Drive Configuration)

Unilumin
URMIII—Ease of Use

Day Mode



Night Mode



Indoor and Outdoor Dual Use.

Day mode and night mode can be switched within 1 second.

NOTE: Optional

Specification Parameter

Unilumin
URMIII—Ease of Use

Type	URMIII2.6	URMIII2	URMIII3	URMIII03	URMIII04	URMIII05
Pixel Pitch	2.6mm	2.9mm	3.9mm	3.9mm	4.8mm	5.9mm
LED Type	3 in 1 SMD					
Brightness	1000nits			5000nits		
Pixels Per Panel	192×192dots 192×384dots	168×168dots 168×336dots	128×128dots 128×256dots	128×128dots 128×256dots	104×104dots 104×208dots	84×84dots 84×168dots
Pixel Density	147,456	112,896	65,536	65,536	43,264	28,224
Panel Weight	7.9 kg/panel 13 kg/panel			8.5 kg/panel 13.9 kg/panel		
Module Size	W250mm×H250mm					
Cabinet Size	W500mm×H500mm×D83mm W500mm×H1000mm×D83mm					
Contrast ratio	3000:1			5000:1		
Material	Die Cast Aluminum					
Environment	Indoor			Outdoor		
Ingress protection	IP30			IP65		
Curve function	-10°~+10°					



2-in-1 Hanging & Ground
Beam



Stacking installation Accessories
(ground beam, ground beam support, back frame, back
frame connector)

Price



URMIII



Design

Show a New Vision of Rental World



Functions

Multifunctional Combination




Performance

Joint Supplier Structure Design

Application

Unilumin
URMIII—Ease of Use

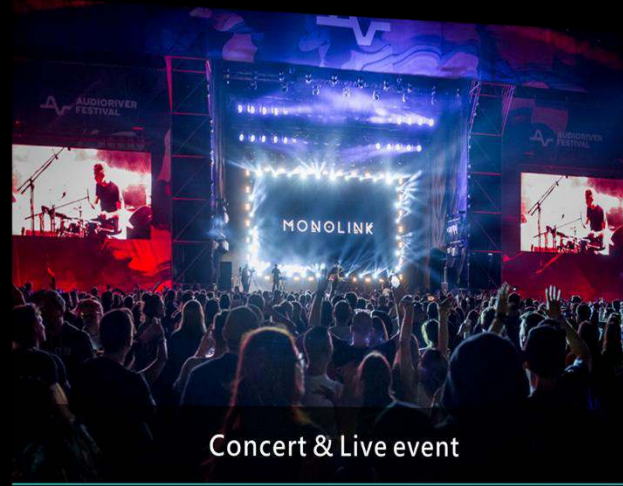

Application Coverage: 100%

THANKS

Unilumin

TOGETHER, FOR A BRIGHTER FUTURE

Unilumin Group Co., Ltd.

Headquarters: 112 Yongfu Rd., Qiaotou Village, Fuyong Town, Baoan District, Shenzhen 518103 China

Factory Address: 6 Lanjing North Road, Pingshan District, Shenzhen 518118 China

Tel: +86-755-29918999

Fax: +86-755-29912092

Sales E-mail: sales@unilumin.com

Official website: <http://www.unilumin.com>

